


INOX DEAD BOLT COLLECTION - DOOR PREPARATORY SPECIFICATIONS

Entry INOX Smart Spring Latch/Dead Bolt - Interior

Notes:

1. This bore specification is applicable for 2 3/8" or 2 3/4" backset dead bolts.
2. Optional Door Position Switch (DPS).
3. This door specification is applicable for 1 3/4" thick minimum, to 4 1/2" thick maximum, wood doors.
4. We recommend a plunge router with a pattern bit for creating recess.
5. This center to center dimension may change with escutcheon selection.

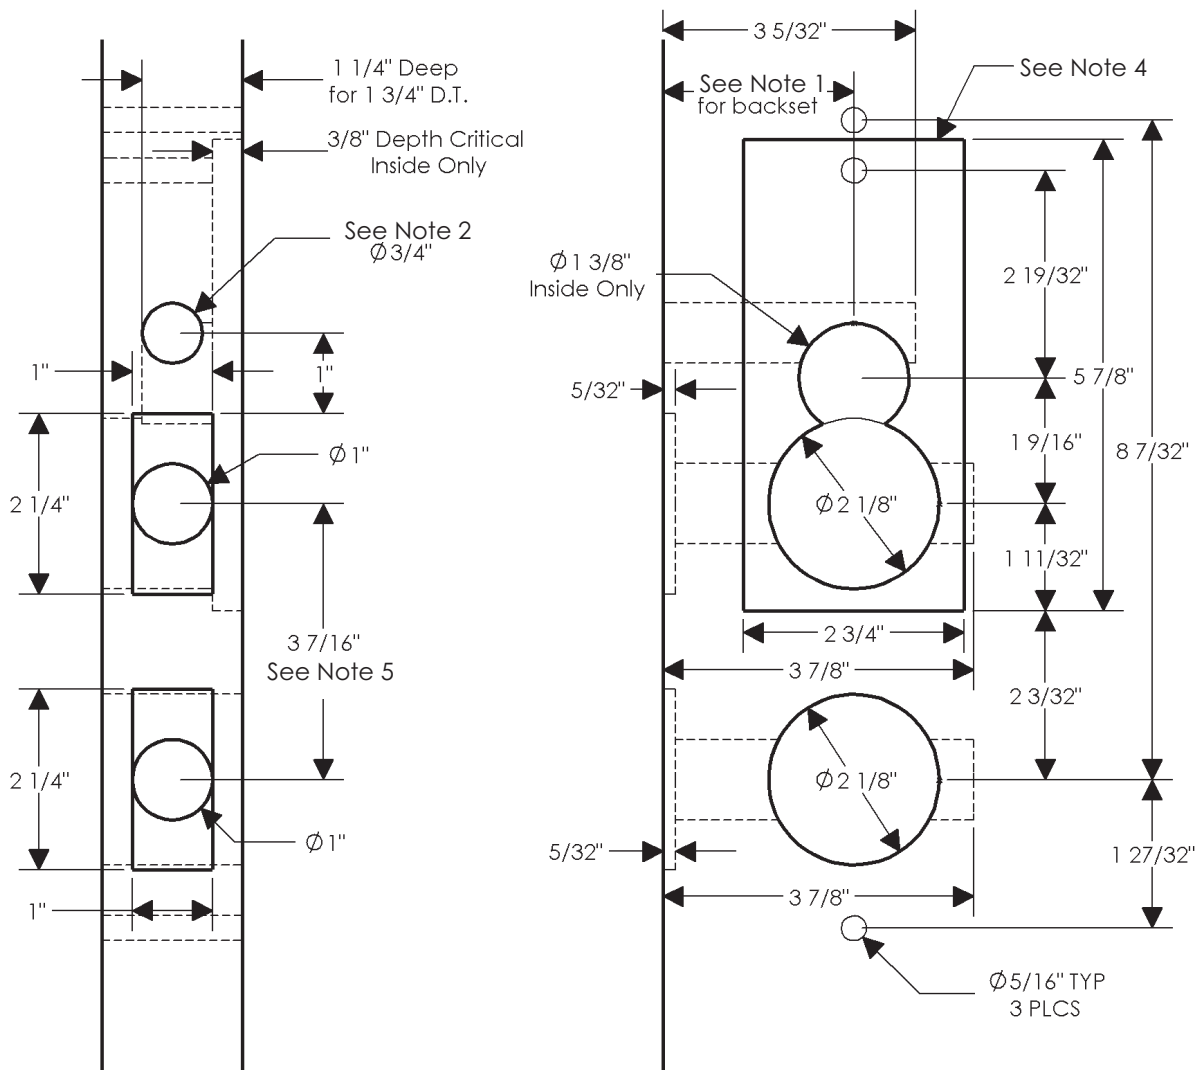

INOX DEAD BOLT COLLECTION - DOOR PREPARATORY SPECIFICATIONS

Entry INOX Smart Spring Latch/Dead Bolt - Exterior

Notes:

1. This bore specification is applicable for 2 3/8" or 2 3/4" backset dead bolts.
2. Optional Door Position Switch (DPS).
3. This door specification is applicable for 1 3/4" thick thick minimum, to 4 1/2" thick maximum, wood doors.
4. This center to center dimension may change with escutcheon selection.

